VER.	AMENDMENT	SIGN	DATE
AQ01	The initial drawing	Red	2024-04-22

Unless specifically stated otherwise, inspection will be carried out in accordance with Fannal's "FN-WI-PZ-56-A2 TP&TPM Appearance Inspection Specification"and later versions.

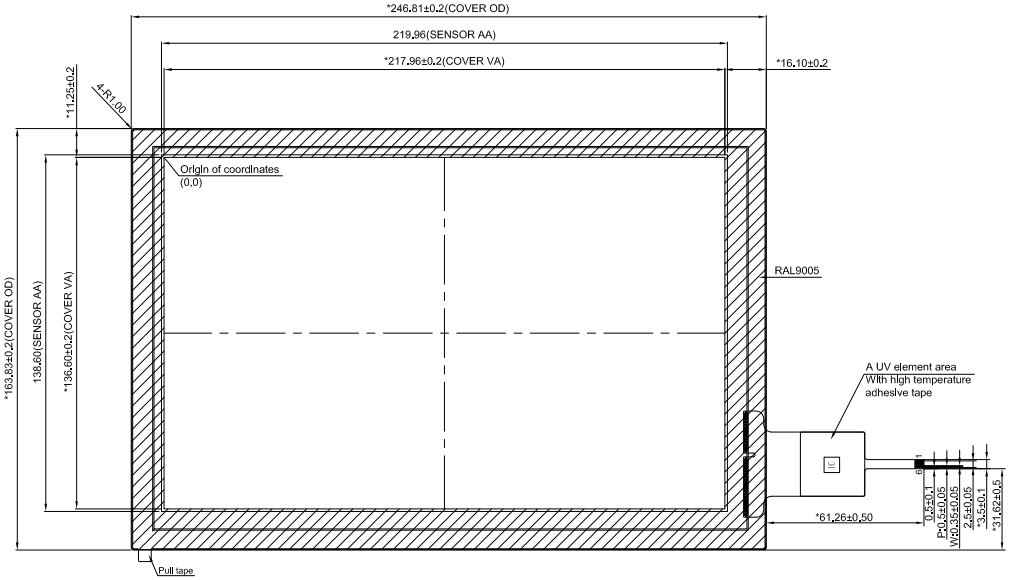

Front view

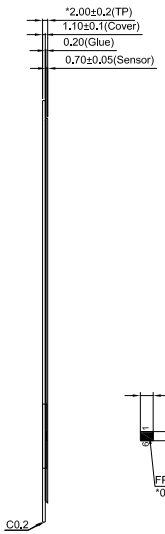

Side view

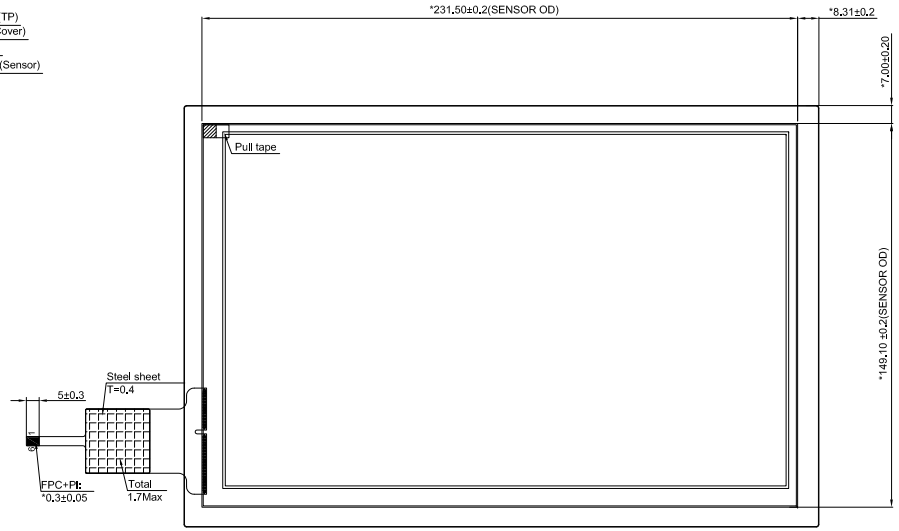

Back view

Important dimensions:*
General tolerance:±0.5.
Dimensions in angular:±1°.

TECHNOLOGY CHARACTERISTICS Touch Panel

Product Strcuture	G+G	Strengthening Method	☐ None ■ Chemically Strengthen ☐ Physical Semi-Strengthen ☐ Physical All Strengthen	Touch Transmittance	85% Min
Touch IC	mxT1664T3			Touch Interface	IIC
No. of Touch	10	Surface Hardness	7H min	Environmental Requirements	■ RoHS ☐ REACH ☐ HF
Cover Material	Sodalime Glass	Sensor Material	■ ITO Glass ☐ ITO Film	Operation Temperature	-20~+70 ℃
Cover Thickness	1.1mm	Sensor Thickness	0.7mm	Storage Temperature	-30~+80 ℃

Touch Interface

1	VCC(5V)		
2	D-		
3	D+		
4	GND		
5	NC		
6	NC		

DRAWN	Red/2024-04-22
CHECKED	Sun/2024-04-22
APPROVED	Hong/2024-04-22
CSR APPROVED	
Customer No.:	
Revision:	AQ01
SHEET 1 OF 1	Scale 1 : 1
	Unit mm

TITLE
Touch Panel

Drawing NO.: FN1010P069A

Project NO.:

FANNAL ELECTRONICS CO., LTD